


ABL/SBL SERIES

6 or 12 VOLT EMERGENCY UNIT

This rugged, contemporary-styled workhorse provides emergency lighting for the most demanding commercial and institutional installations—all with specification grade construction details and aesthetics.



SPECIFICATIONS

CONSTRUCTION: Housing and front panel are manufactured from heavy gauge steel (SBL) or extruded and die-formed aluminum (ABL). Front panel swings open for easy access to internal components.

FINISH: White baked polyurethane powder coat (SBL) or brushed aluminum (ABL), standard. Other colors are also available.

LAMP HEADS: 2 or 3 contemporary styled, aluminum, adjustable PAR 36-sized heads, furnished with high intensity, 6 or 12 volt incandescent lamps. Injection-molded thermoplastic, weatherproof “bug-eye” lamp heads available where local codes allow. 9 Watt lamps are standard; please specify other wattages (see page 30 for available lamping options).

MOUNTING: Universal knockouts for back mount standard, optional canopy available for ceiling or end mount.

BATTERY: Sealed 6 or 12 volt, maintenance free lead acid battery operates for a minimum of 120 minutes. See Battery Capacity Chart for capacity requirements.


CHARGING CIRCUITRY: Solid state charger features automatic brown-out protection, low voltage disconnect, AC line latching, momentary test switch and charge indicating light are standard.

Dual 120/277 Volt Input.

LABELS: U.L., E.T.L., or ENTELA Listed.

WARRANTY: See warranty page.

DIMENSIONS

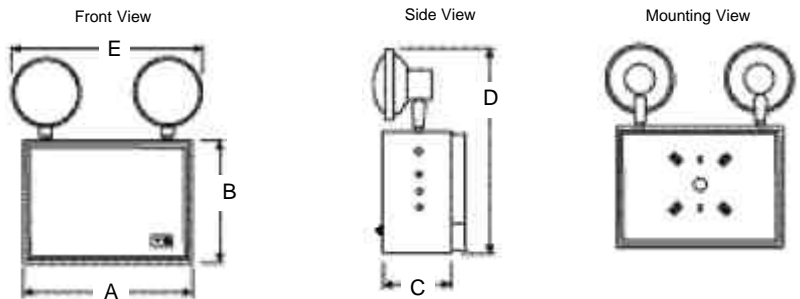

DIMENSIONS					
Housing size	A	B	C	D	E
I	11"	8"	4.5"	15"	11"
II	16"	12"	7.6"	18"	16"
III	27"	12"	7.6"	18"	27"

BATTERY CAPACITY*					
Model #	Watts	Voltage	Total No. Avail. Heads/Remote		Housing Configuration
			2 Hours	1.5 Hours	
ABL-6-27	27	6	2	3	I
ABL-6-36	36	6	3	4	I
ABL-6-56	56	6	4	6	II
ABL-6-120	120	6	6	10	II
ABL-12-36	36	12	2	3	I
ABL-12-60	60	12	3	5	II
ABL-12-130	130	12	6	10	II
ABL-12-200	200	12	12	19	II
ABL-12-300	300	12	19	33	III
ABL-12-450	450	12	32	50	III

ABL/SBL Series

Example: ABL-6-2-PAR-27-BA-V



- Series**
 - ABL- Aluminum Housing
 - SBL- Steel Housing
- Output (DC) Voltage**
 - 6
 - 12
- #Heads**
 - 0
 - 1
 - 2
 - 3
- Lamp Style**
 - PAR-PAR 36 aluminum heads
 - TP-thermo-plastic “bug-eye” heads
- Wattage**
 - 18
 - 27
 - 36
 - 56
 - 60
 - 120
 - 130
 - 200
 - 300
 - (12 volt only)
 - 450
 - (12 volt only)
- Finish**
 - BA- Brushed Aluminum
 - WH- White
 - CC- Custom Color or Finish
- Options**
 - LW-Lamp Wattage (specify if other than 9 Watts)
 - NCB-Nickel Cadmium Battery
 - WG-Wire Guard
 - V-Voltmeter
 - A-Ammeter
 - TP-Tamper proof screws
 - SB-Sealed Beam PAR 36 lamp
 - SH-Shelf Mounting Kit
 - FAI-Fire Alarm Interface
 - H-Halogen lamp¹
 - RH-Remote Heads²
 - SDT-Self Diagnostic Testing
 - IRT-Infrared Remote Test Switc

NOTE: Specifications and dimensions subject to change without notice
¹ See Page 30-Lamp Replacements ² See Page 29-Remote Heads

