



RECESSED ADJUSTABLE GIMBLE RING

The emergency lighting solution for low ceilings, or to integrate with existing recessed lighting plans. The adjustable lamp head makes the RDG ideal for corridors and above doorways.

SPECIFICATIONS

CONSTRUCTION: All components are contained in a drawn steel box. Trim finish is white polyurethane powder coat, standard. Gimble ring rotates 356P horizontally and adjusts vertically 42P.

LAMPS: PAR 36 sized heads, sealed beam tungsten, high-intensity lamp that illuminates when normal power fails.

MOUNTING: Unit recesses into the ceiling. All units furnished with mounting bracket (bar hangers supplied by others.) May be used as a remote fixture.

BATTERY: Sealed 6 Volt, maintenance free lead calcium battery operates lamp for a minimum of 90 minutes.


CHARGING CIRCUITRY: Solid state charger features automatic brown-out protection, low voltage disconnect, and line-latching to prevent battery discharge before installation. A momentary test switch and charge indicating light are standard.

Dual 120/277 Volt Input.

LABELS: U.L., E.T.L., or ENTELA Listed.

WARRANTY: See warranty page.

DIMENSIONS

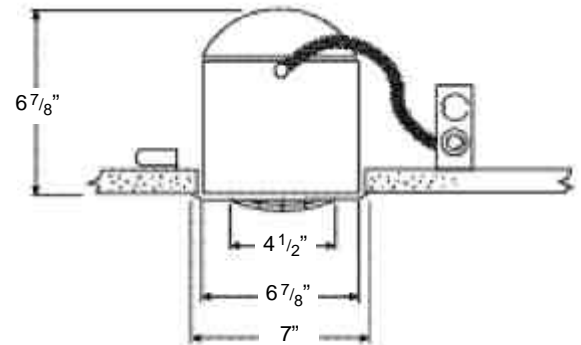

ORDERING INFORMATION

Example: RDG-H

RDG			
<input checked="" type="checkbox"/> Series	<input checked="" type="checkbox"/> Output Voltage	<input checked="" type="checkbox"/> Lamp Wattage	<input checked="" type="checkbox"/> Options
<input type="checkbox"/> RDG-Recessed Gimbel	<input type="checkbox"/> 6 <input type="checkbox"/> 12	<input type="checkbox"/> 9 <input type="checkbox"/> 12 <input type="checkbox"/> 18 <input type="checkbox"/> 25	<input type="checkbox"/> H-Halogen Lamp <input type="checkbox"/> NCB-Nickel Cadmium Battery <input type="checkbox"/> MOD-Special Finished Trim

NOTE: Specifications and dimensions subject to change without notice

