


PRO SERIES INVERTERS

600VA to 1200VA FAST TRANSFER POWER SUPPLIES

The patented Pro Series inverter provides exit and emergency lighting power for small to mid-size installations at a fraction of the cost of traditional UPS or IPS systems. It is also ideal for keeping your business running—from phones and lights to security systems and computers (with other UPS backup)—in the event of a power outage.

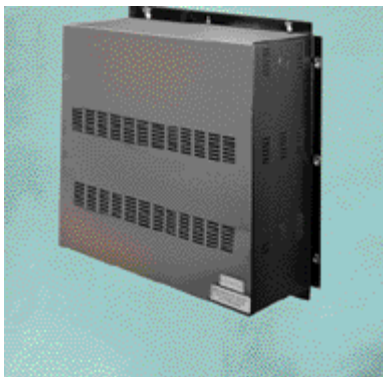

SPECIFICATIONS

CONSTRUCTION: Compact, separate battery housing and electronics cabinet provides maximum mounting flexibility--almost anywhere where there is standard 120V power! The electronics cabinet weighs less than 20 pounds; the battery unit is under 110 pounds. Both compartments are manufactured from heavy gauge die-formed steel.

FINISH: Powder coat matte black finish is standard; other finishes are available as options (please specify).


EMERGENCY OPERATION: Emergency system provides 120V power when normal (AC) power fails in less than 1/2 second. All Exit and Emergency lighting, as well as incandescent and fluorescent lighting, telephone systems and faxes, security systems, and most electrical and electronic equipment may be run on the inverter system, up to 1200VA of current. Computers and computer peripherals may also be used on the Pro Series inverter as long as they have additional UPS protection.

BATTERIES: System comes complete with up to 18 12V, maintenance free Lead Acid batteries. Additional batteries may be added to the system to increase run times.

ELECTRONICS: Solid State, transformerless charging circuitry features automatic brownout protection and low voltage disconnect, which prevents over-discharge of batteries. Batteries will recharge fully within 24 hours, and maintain charge until inversion is required. Two independent circuits assure that the batteries are never over-charged. The unit includes UL1449 rated MOV surge protection and automatic current limiting to protect against output overload (lights operated by the inverter will flash if an overload occurs until the condition is removed.)

LABELS: UL 924/1778 Listed.

WARRANTY: See warranty page.

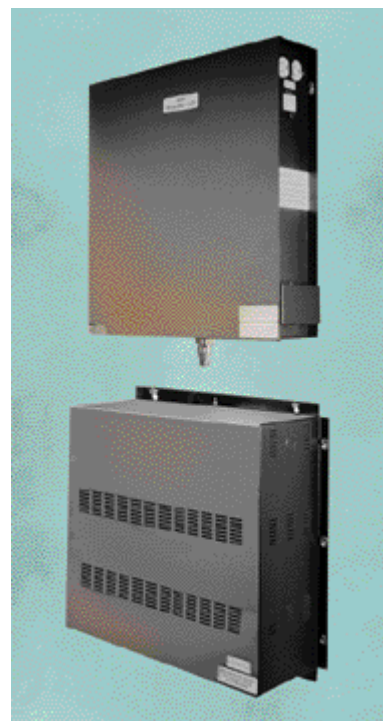

DIMENSIONS

Electronic Cabinet	19"	17"	4 1/2"
Battery Cabinet	19"	17"	7 1/2"

ORDERING INFORMATION

EXAMPLE: PRO-600VA-B

Series

PRO

Output

- Current/Wattage
- 600VA
 - 900VA
 - 1200VA
 - High Output (specify up to 5000VA)

Finish

- B- Black*
- CC- Custom Color
- *=Standard

Options

FAI-Fire Alarm Interface

