

RE/SE SERIES EMRE/EMSE SERIES

Our standard fluorescent edgelit exits offer architectural grade aesthetics at very competitive prices – a combination unmatched in the industry.



SPECIFICATIONS

CONSTRUCTION: Recessed--Housing is constructed of 20 gauge steel. Conduit knockouts are supplied on top and ends of housing. Face plate is brushed aluminum, standard, but can be furnished in plated or painted finishes. Furnished with adjustable mounting brackets for use with conduit or bar hangers.

Surface—Housing and face plate are manufactured from heavy gauge die-formed aluminum, brushed finish standard. Custom colors and finishes are available (please specify). Supplied with a canopy for ceiling, end wall, back or pendant mount (specify length).

PANEL: Cast acrylic panels are engraved and silk screened with 6" letters and arrows or chevrons to meet local codes requirements. Red letters on white background is standard. Other color combinations are available as required.

ELECTRICAL: Wired with 7/9 Watt, NPF ballasts and furnished with two 7 or 9 Watt compact fluorescent lamps with built-in starter. Power requirements –21.6 watts at 120V; average lamp life –10,000 hours. Specify 120V or 277V operation.

LED—Energy efficient – draws a maximum 4 watts and produces bright, even illumination across the panel face. LEDs have a 100,000 hour life – virtually maintenance free.

EMERGENCY OPERATION: Emergency Backup System mounts inside the housing and comes complete with 6V, maintenance free Lead Calcium battery (Nickel Cadmium is standard for LED systems) for two hour operation. Solid State charger features automatic brownout protection and low voltage disconnect, which prevents over-discharge of battery. A momentary test switch and charge indicating light are standard.


Fluorescent signs are furnished with two 3.6 Watt, 6V DC wedge base lamps which illuminate when normal power fails.

LABELS: UL/ETL Listed. CITY OF CHICAGO APPROVED.


WARRANTY: See warranty page.

DIMENSIONS


RE Front View

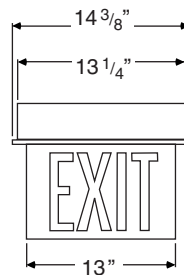


RE Side View




REW Front View




REW Side View




EMRE Front View




EMRE Side View




EMSE Front View




EMSE Side View




SE/EMSE
Canopy



SE Front View



SE Side View



NOTE: Specifications and dimensions subject to change without notice

RE/SE SERIES

RE/EMRE, SE/EMSE, REW/EMREW

ORDERING INFORMATION


EXAMPLE: EMRE-21-2FL120-WH-GLR

<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<input checked="" type="checkbox"/> Series	<input checked="" type="checkbox"/> Panel Codes	<input checked="" type="checkbox"/> Lamping	<input checked="" type="checkbox"/> Voltage	<input checked="" type="checkbox"/> Finish	<input checked="" type="checkbox"/> Options
RECESSED EDGELIT AC Only <input type="checkbox"/> RE <input type="checkbox"/> REW - Wall Mount AC/Emergency <input type="checkbox"/> EMRE <input type="checkbox"/> EMREW - Wall Mount	SINGLE FACE <input type="checkbox"/> 2 - Stairs <input type="checkbox"/> 3 - Exit <input type="checkbox"/> 5 - Stairs→ <input type="checkbox"/> 6 - Exit→ <input type="checkbox"/> 8 - Stairs← <input type="checkbox"/> 9 - Exit← <input type="checkbox"/> 11 - Stairs↔ <input type="checkbox"/> 12 - Exit↔ DOUBLE FACE <input type="checkbox"/> 17 - Stairs <input type="checkbox"/> 18 - Exit <input type="checkbox"/> 20 - Stairs→ <input type="checkbox"/> 21 - Exit→ <input type="checkbox"/> 23 - Stairs↔ <input type="checkbox"/> 24 - Exit↔	<input type="checkbox"/> 2FL-Fluorescent	<input type="checkbox"/> 120 <input type="checkbox"/> 277	<input type="checkbox"/> BA-Brushed Aluminum* <input type="checkbox"/> WH-White <input type="checkbox"/> CC-Custom Color *Standard	<input type="checkbox"/> HFP-Hinged Face Plate <input type="checkbox"/> TP-Tamper Proof screws <input type="checkbox"/> FAI-Fire Alarm Interface <input type="checkbox"/> BZ-Buzzer <input type="checkbox"/> FLS-Flasher <input type="checkbox"/> GLR-Fuse <input type="checkbox"/> EXC-Emergency Circuit <input type="checkbox"/> MOD-Special Panel Wording or Color

*Add "C" after code number for Chevrons. Leave blank for arrows.

<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<input checked="" type="checkbox"/> Series	<input checked="" type="checkbox"/> Panel Codes	<input checked="" type="checkbox"/> Lamping	<input checked="" type="checkbox"/> Voltage	<input checked="" type="checkbox"/> Finish	<input checked="" type="checkbox"/> Options
SURFACE EDGELIT AC Only <input type="checkbox"/> SE AC/Emergency <input type="checkbox"/> EMSE	SINGLE FACE <input type="checkbox"/> 2 - Stairs <input type="checkbox"/> 3 - Exit <input type="checkbox"/> 5 - Stairs→ <input type="checkbox"/> 6 - Exit→ <input type="checkbox"/> 8 - Stairs← <input type="checkbox"/> 9 - Exit← <input type="checkbox"/> 11 - Stairs↔ <input type="checkbox"/> 12 - Exit↔ DOUBLE FACE <input type="checkbox"/> 17 - Stairs <input type="checkbox"/> 18 - Exit <input type="checkbox"/> 20 - Stairs→ <input type="checkbox"/> 21 - Exit→ <input type="checkbox"/> 23 - Stairs↔ <input type="checkbox"/> 4 - Exit↔	<input type="checkbox"/> 2FL-Fluorescent	<input type="checkbox"/> 120 <input type="checkbox"/> 277	<input type="checkbox"/> BA-Brushed Aluminum* <input type="checkbox"/> WH-White <input type="checkbox"/> CC-Custom Color *Standard	<input type="checkbox"/> EMT-End Mount <input type="checkbox"/> BMT-Back Mount <input type="checkbox"/> PK-Pendant Kit (specify stem length) <input type="checkbox"/> HFP-Hinged Face Plate <input type="checkbox"/> TP-Tamper Proof screws <input type="checkbox"/> FAI-Fire Alarm Interface <input type="checkbox"/> BZ-Buzzer <input type="checkbox"/> FLS-Flasher <input type="checkbox"/> GLR-Fuse <input type="checkbox"/> EXC-Emergency Circuit <input type="checkbox"/> MOD-Special Panel Wording or Color

*Add "C" after code number for Chevrons. Leave blank for arrows.

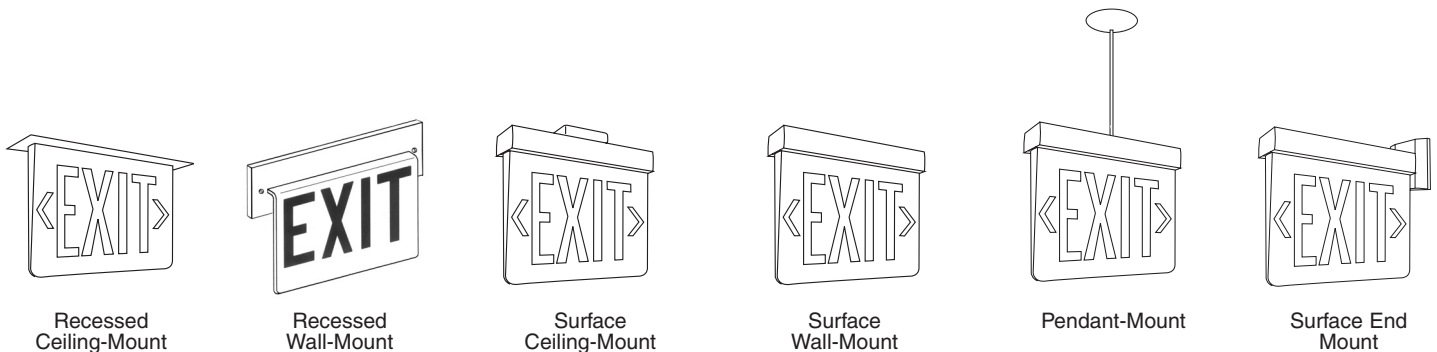

NOTE: Specifications and dimensions subject to change without notice

Alpha Enterprises Lighting
 2140 W. Hubbard Street • Chicago, IL 60612
 Phone: 312-829-6610 • Fax: 312-896-5106